




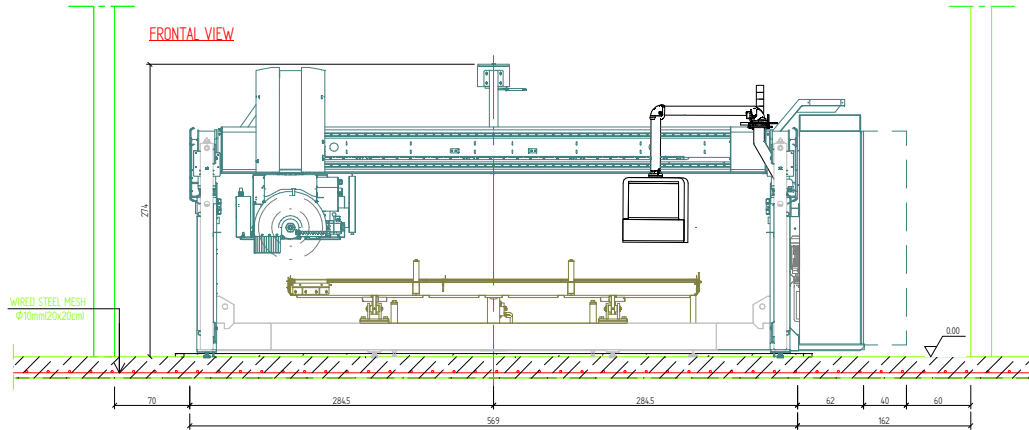

SIDE VIEW

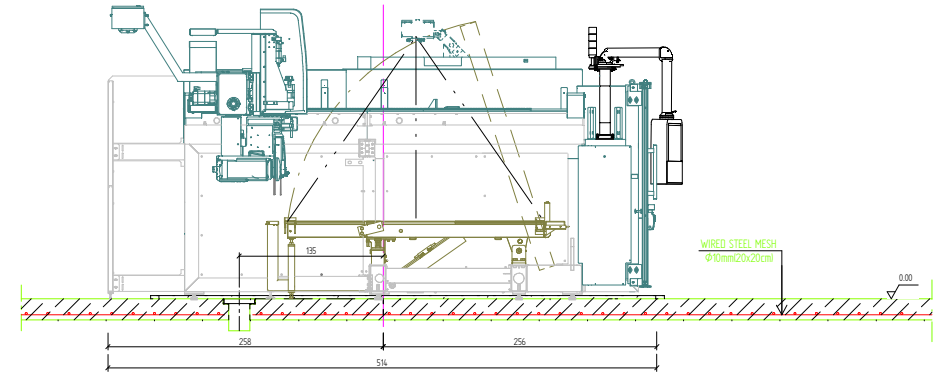

PLAN VIEW

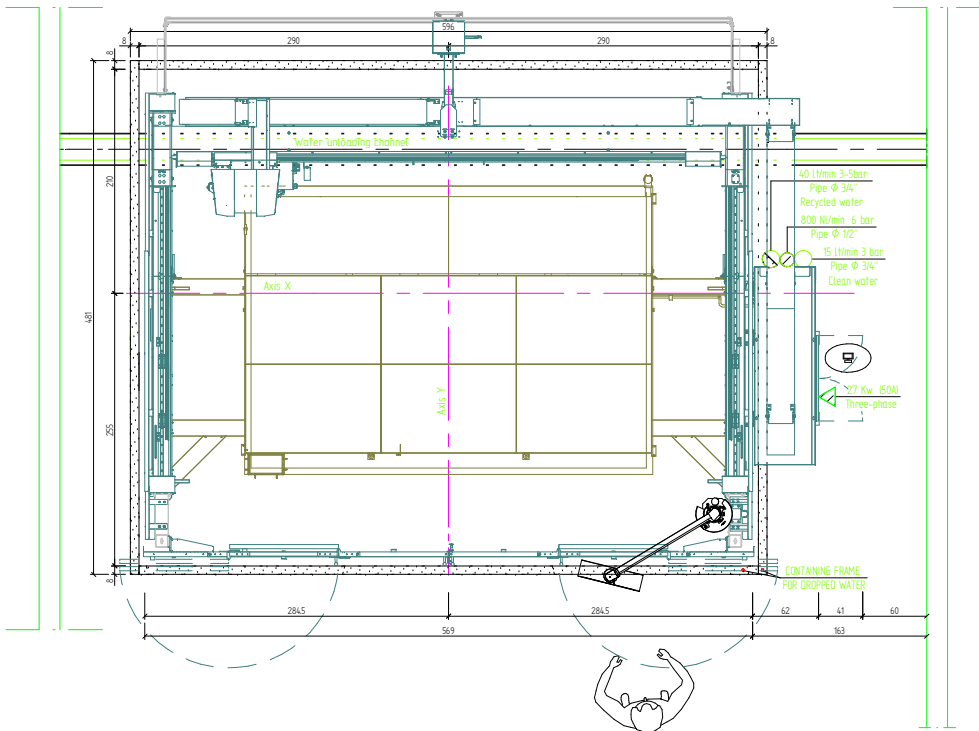

OPERATING VOLTAGE	400V - 50Hz	△	FEEDING POINT ON DISTRIBUTION BOARD
		⏏	POWER CONTROL BOARD
OPERATING PRESSURE	min 3 - max 5 bar	∅	RECYCLED WATER FILTERED AT 250 micron
Φ PIPE CONNECTION TO THE MACHINE, INCH		○	CLEAN WATER FILTERED AT 25 micron
OPERATING PRESSURE	3 bar	○	COMPRESSED AIR SUPPLY
Φ PIPE CONNECTION TO THE MACHINE, INCH		○	(DRY/OILFREE, FILTERED AT 5 micron)
OPERATING PRESSURE	6 bar	○	NETWORK INTERNET (REMOTE CONTROL)
Φ PIPE CONNECTION TO THE MACHINE, INCH		○	
N.B. ⚡ ALL THE ELETTRIC CONTROL BOARD MUST BE EARTHED BY MEANS OF AN ADEQUATE GROUND CABLE			

GROUND PRESCRIPTIONS
GROUND ALLOWABLE PRESSURE > 1.0 daN/cm²
ABSENCE OF SOIL ENBANKMENT UNDER THE FOUNDATION

MATERIALS PRESCRIPTIONS
CONCRETE FLOOR: CONCRETE class min. (C20/25 Rck>250 daN/cm²)
Min. thickness 20cm
WIRED STEEL MESH Φ10mm, #20x20cm

REMARKS
STEEL PROFILE 80x30mm, FOR DROPPED WATER CONTAINING, IS NOT INCLUDED IN BRETON SUPPLY.
THE FRAME MUST BE FIXED TO THE FLOOR USING EXPANSION BOLTS (ABOUT ONE EACH 40cm) NOT INCLUDED IN BRETON SUPPLY.
THE FRAME MUST BE SEALED TO THE FLOOR BY MEAN OF SILICONE.
THE RUBBER HOSES, NEEDED TO DRAIN WATER FROM THE MACHINES, ARE NOT INCLUDED IN BRETON SUPPLY.

ALL DIMENSIONS ARE IN **cm** EXCEPT WHEN OTHERWISE INDICATED

0	Emmissione disegno				
REVISIONE	DESCRIZIONE MODIFICA	DATA	DISegnATO	CONTROLLATO	APPROVATO
REVISIONE	MODIFICATA DESCRIZIONE	DATA	DISegnATO	CONTROLLATO	APPROVATO

breton

CLIENTE :
CUSTOMER

DENOMINAZIONE/DESCRIPTION:
BRIDGE SAW Mod.GENYA 600

GENERAL LAYOUT

SCALE/SCALE:
1:25

UNIT:
cm

FOGLIO/SHHEET:
1 / 1

STATO DOCUMENTO: RELEASED